


Fiber Optics Fundamentals

Surasak Sanguanpong
nguan@ku.ac.th
<http://www.cpe.ku.ac.th/~nguan>
Last updated: May 19 , 1999

Applied Network Research Group

Department of Computer Engineering, Kasetsart University


Bending of Light Ray

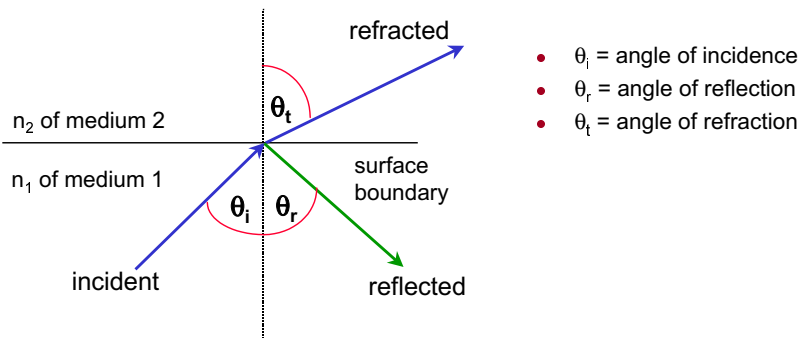

refraction index : $n = c/v$

The surface represents a boundary between two media. Let θ_i be the angle at which the light wave intersects the boundary. Some of the light will reflect back at an $\theta_r = \theta_i$ and some will cross the boundary into the other medium.

Snell's Law

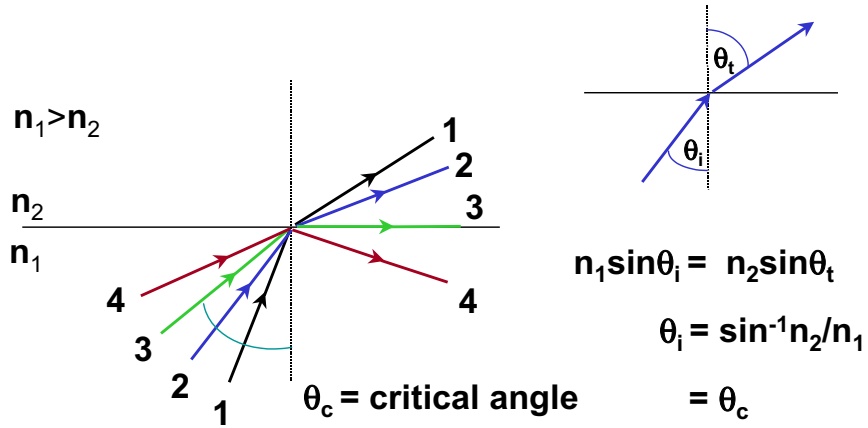


Applied Network Research Group

Department of Computer Engineering, Kasetsart University

From Snell's law, if θ_t reach 90° , θ_i will equal to $\sin^{-1} n_2/n_1$. This θ_c is called critical angle of incidence. Any light rays that are incident at angles greater than critical angle will reflect back into medium.

Propagation Modes

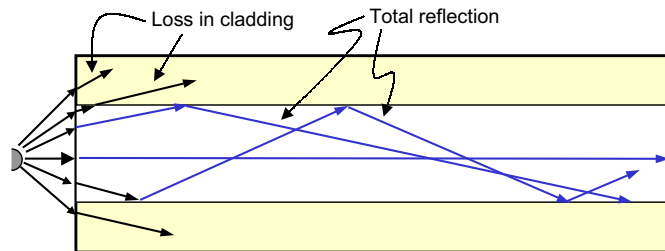


$$M = \frac{\left(\frac{\pi d}{\lambda} \sqrt{(n_1)^2 - (n_2)^2} \right)^2}{2}$$

M = the number of modes
 d = core diameter (m)
 λ = wavelength (m)
 n_1 = refraction index of core
 n_2 = refraction index of cladding

A fiber core is fairly thick relative to a wavelength of light and allow the light to enter it at many difference angles. There is a finite number of angles at which the rays reflect and propagate the length of the fiber. Each angle defines a path or a mode.

Fiber classification

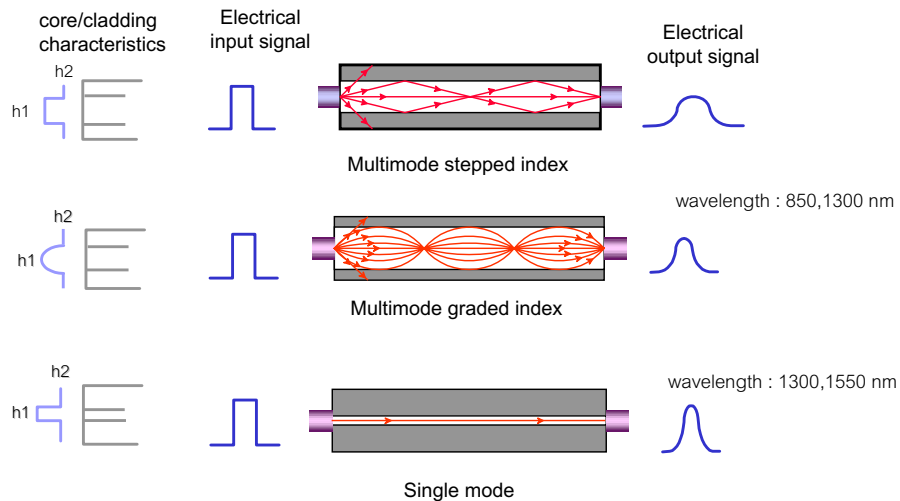

Applied Network Research Group


Department of Computer Engineering, Kasetsart University

There are basically two modes of a transmission in a fiber. A *multimode* fiber has a number of paths in which light ray may travel. A *single mode* has a light ray in one direction only.

Fibers are further classified by the refractive index profile of their core. They can be either *step index* or *graded index*. Three main types of fibers are *multimode step-index fiber*, *multimode graded index fiber* and *single mode fiber*.

The refractive index of multimode step-index fiber is uniformly throughout the core. The refractive index of multimode graded-index fiber is gradually less dense, light travels radially outward it begins to bend back toward the center, eventually reflecting back. Because the material is also less dense, the light travels faster. Reducing the core diameter to that of a single wavelength (3-10 μm) will let the light propagate along a one mode only.

Loss in Glass Fibers

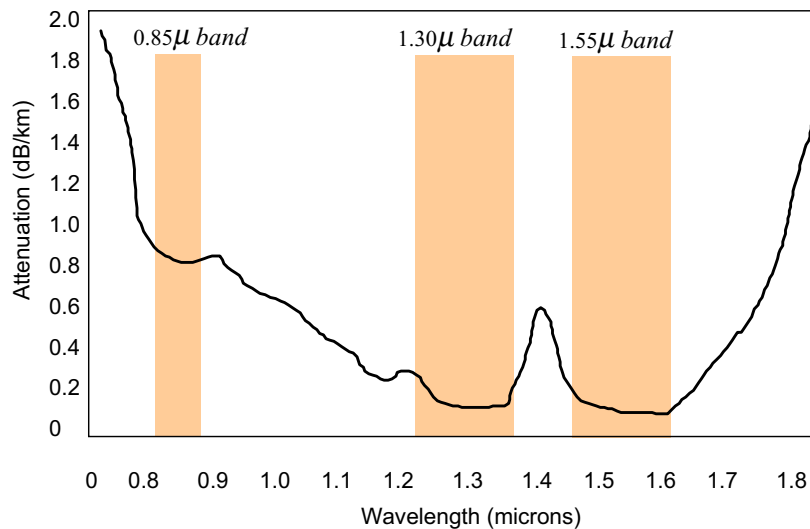

Applied Network Research Group

Department of Computer Engineering, Kasetsart University

Because of the attenuation versus wavelength characteristics of glass optical fiber, there are three wavelength ranges, or windows, preferred for transmission.


With the first window at 850 nm, light sources and electronics can be made from alloy semiconductors with $Ga_{1-x}Al_xAs$.

The second window is around 1300 nm. Above this window there is a peak attenuation due to absorption of light by the hydroxyl (OH) ions trapped in the fiber during processing. This window coincides with the point of minimum chromatic dispersion of the fiber.


The fiber attains its greatest transparency at wavelengths around 1550 nm, where attenuation decreases to only 0.2 dB per kilometer. Above 1600 nm, it increases again due to absorption. [Powers, P. John, *An Introduction to Fiber Optic Systems*, Aksen Assoc. Inc. Publishers, 1993]. Above 1600 nm, glass is no longer transparent to infrared light. Instead, the light is absorbed and converted to heat,

Light Source

LED



Injection
Laser Diode

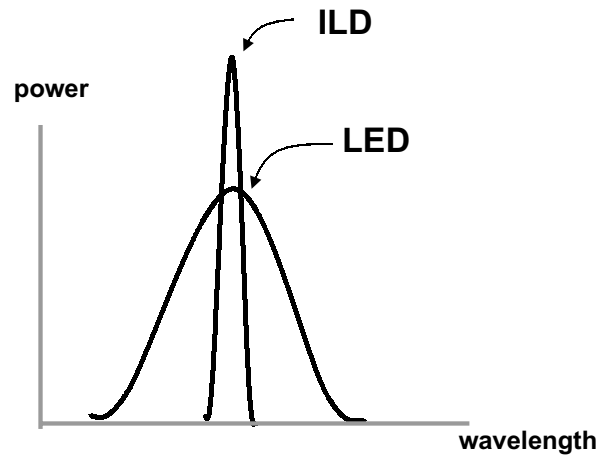

A light source such as a LED or a laser is placed at one end of the fiber. The light source emit short but rapid pulses of light that enter the core at different angles. The laser produce a very pure and narrow beam. It also has a high-power output, allowing the light to propagated further that produced by the LED. The LED produces less concentrated light consisting of many wavelengths.

Optical Fiber Comparison


	Multimode	Single mode
Light source	LED/Laser	Laser
Bandwidth	>1 GHz/km	up to 1000 GHz/km
Wavelength	850, 1300	1300, 1550
core/cladding	62.5/125*	8/125
Applications	LAN, backbone	Long distance, Telcom lines

* options with 50/125, 100/140

Standard fibers are categorized as *single mode* or *multimode*. Single mode fibers are appropriate for long distance with high data rate. Multimode fiber are for shorter distance or local area networks. The most popular one is 62.5/125 type.


Typical Fiber Cable

Single core



- Materials for cladding and core:
 - glass cladding/glass core
 - plastic cladding/glass core
 - plastic cladding/plastic core

Multicore




The major components of a fiber-optics cable are the core, cladding, buffer, strength, strength member and the jacket.

The core is made of glass or plastic. Plastic is easier to manufacture and use but works shorter distance than glass. The core can be anywhere from about 2 to several hundred microns ($1 \text{ micron} = 10^{-6} \text{ m}$).

The core and cladding are actually manufacture as a single unit. The cladding is usually of plastic with a lower index of reflection than core.

Cable Structures

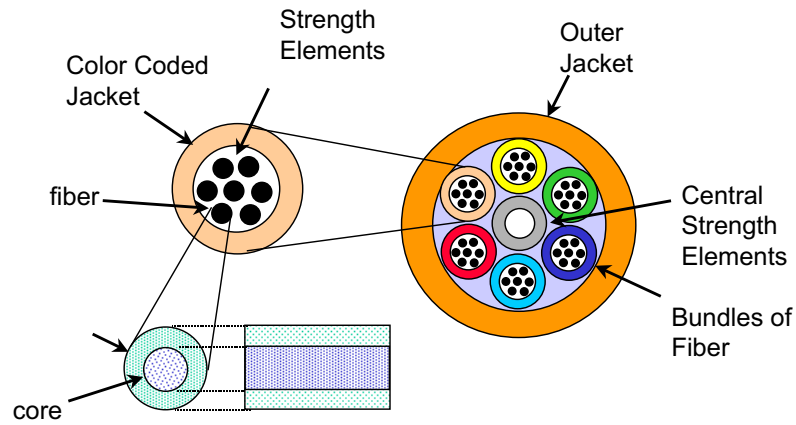

Applied Network Research Group

Department of Computer Engineering, Kasetsart University

Fiber cables are normally bundled with several cores e.g. 2, 4, 6, 8, 12, 24, 36 or 72 (depends on manufacturing).

Fiber in use

- **Plenums or non-plenums**
 - plenum cable has a fire-resistant jacket, which will not burn, smoke or
 - give off toxic fumes when exposed to heat
- **Riser cables**
 - cable that runs vertically; e.g. between floors in a building
- **Indoor or Outdoor**
 - Indoor cable used in building. Outdoor cable used in underground,
 - direct burials, and aerial applications between buildings.

Outdoor cable is filled with a compound formulated to protect the fibers from environmental damage such as moisture.